

DATA: 15/09/2022

72R43162006: 4SDP 3/16C

DATI POMPA E MOTORE




n (rpm):	2900	Tipo motore:	IM
H max (m):	101.00	Fasi motore:	3~
H min (m):	33.00	Un (V):	400
Q min (mc/h):	1.20	fn (Hz):	50
Q max (mc/h):	4.20	Poli:	2
Pn (kW):	1.10	Max temperatura del liquido (°C):	35
Pn (HP):	1.50	Peso (kg):	12.500

MATERIALI

Camicia esterna:	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)	Diffusore:	Null
Corpo di mandata:	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)	Albero:	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)
Lanterna aspirante:	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)	Filtro:	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)
Corpo stadio:	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)	Viti:	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)
Girante:	Noryl PPO-GF20		

DATA: 15/09/2022

72R43162006: 4SDP 3/16C

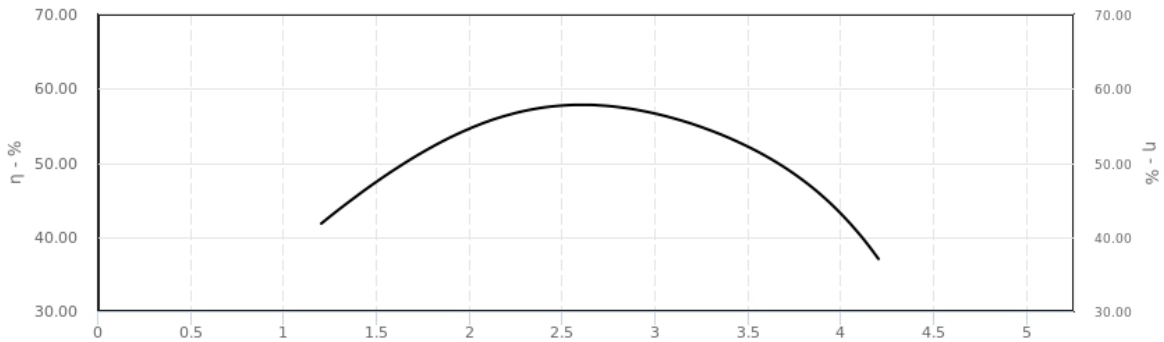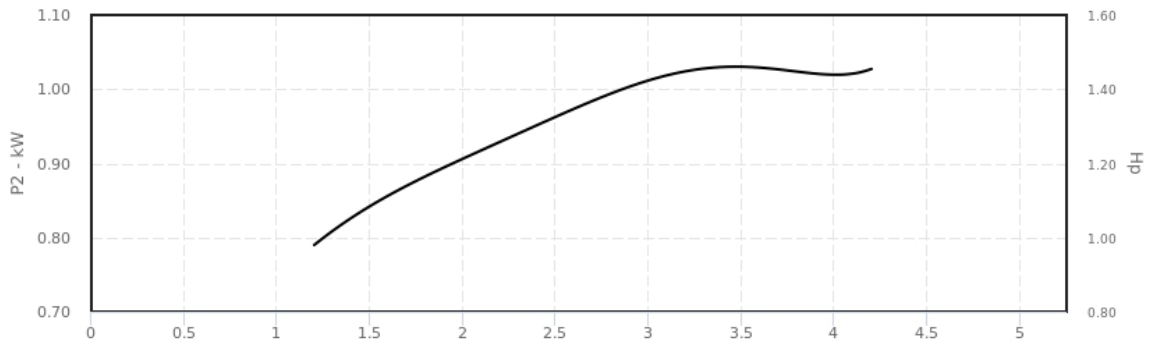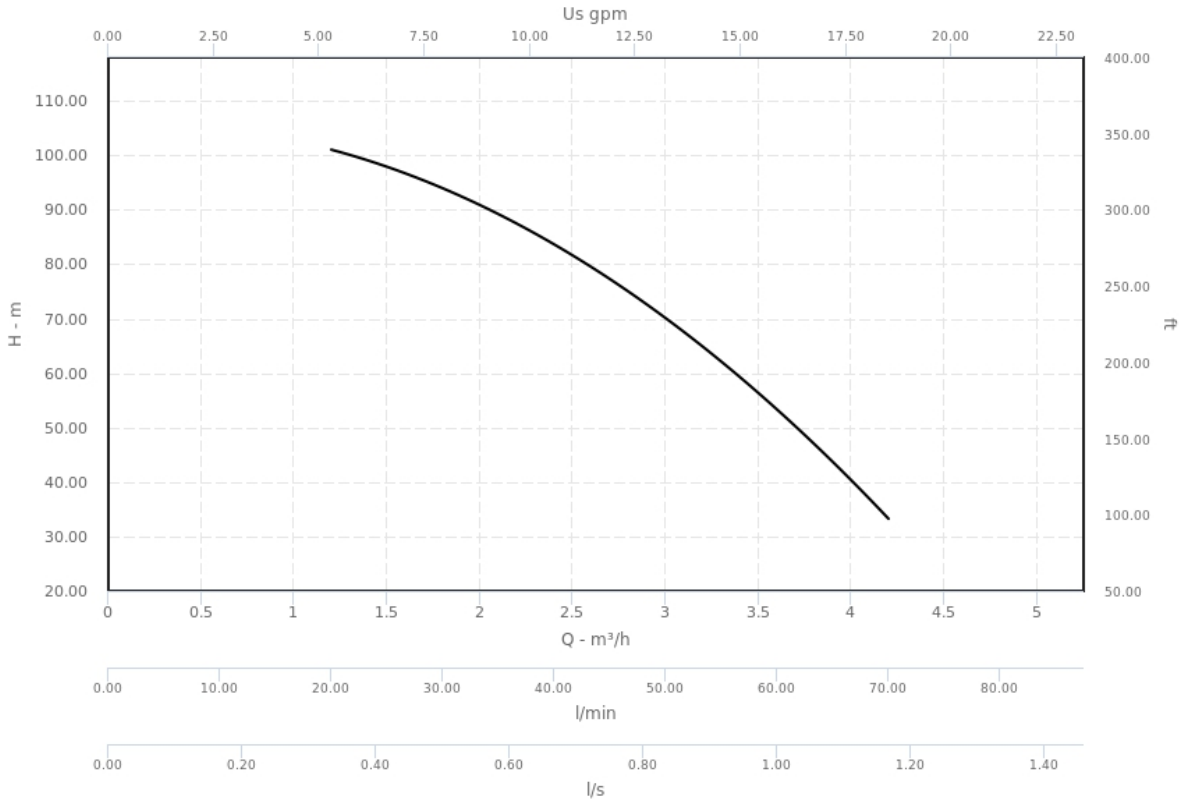

DATA: 15/09/2022

72R43162006: 4SDP 3/16C

DIMENSIONI (MM)

dn2: Rp 1 1/4"
f: 430.00 mm
fM: 792.00 mm
I5: 98

