

DATA: 15/09/2022

**72S43321006: 4SDPM 3/32C**

## DATI POMPA E MOTORE




<b>n (rpm):</b>	2900	<b>Fasi motore:</b>	1~
<b>H max (m):</b>	200.00	<b>Un (V):</b>	230
<b>H min (m):</b>	62.00	<b>fn (Hz):</b>	50
<b>Q min (mc/h):</b>	1.20	<b>Poli:</b>	2
<b>Q max (mc/h):</b>	4.20	<b>Max temperatura del liquido (°C):</b>	35
<b>Pn (kW):</b>	2.20	<b>P1 (kW):</b>	3.25 kW
<b>Pn (HP):</b>	3.00	<b>Peso (kg):</b>	23.550
<b>Tipo motore:</b>	IM		

## MATERIALI

<b>Camicia esterna:</b>	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)	<b>Diffusore:</b>	Null
<b>Corpo di mandata:</b>	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)	<b>Albero:</b>	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)
<b>Lanterna aspirante:</b>	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)	<b>Filtro:</b>	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)
<b>Corpo stadio:</b>	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)	<b>Viti:</b>	Acciaio inossidabile al Cr-Ni 1.4301 EN 10088 (AISI 304)
<b>Girante:</b>	Noryl PPO-GF20		

DATA: 15/09/2022

**72S43321006: 4SDPM 3/32C**

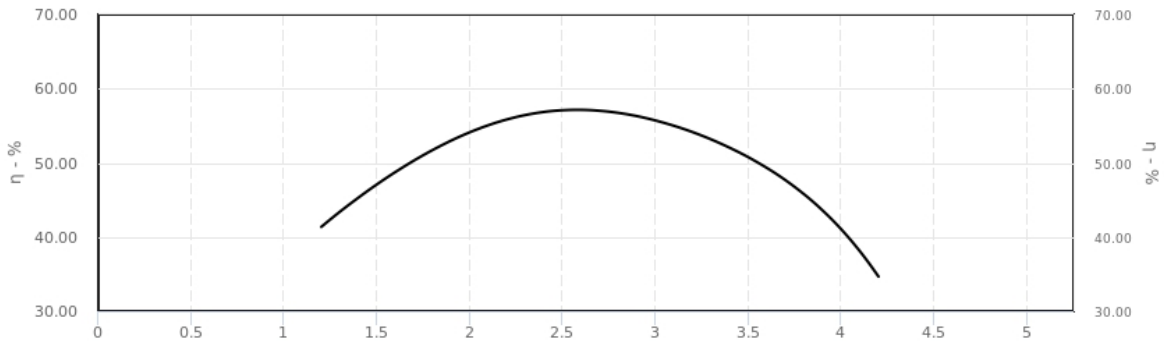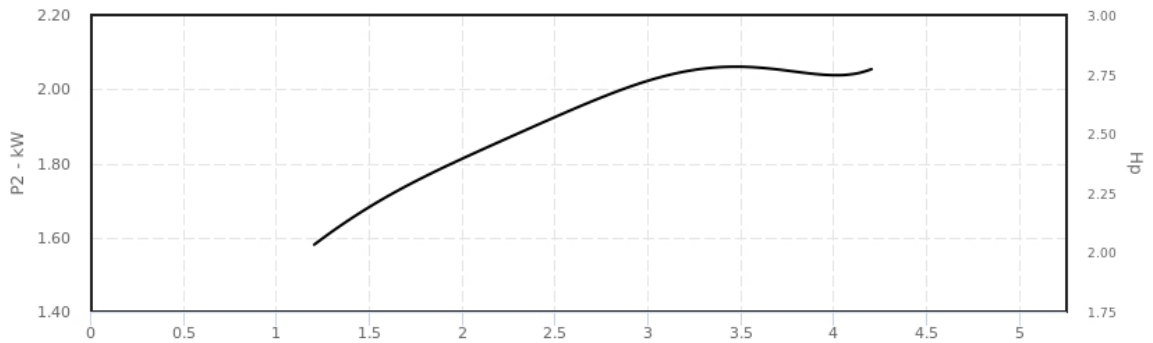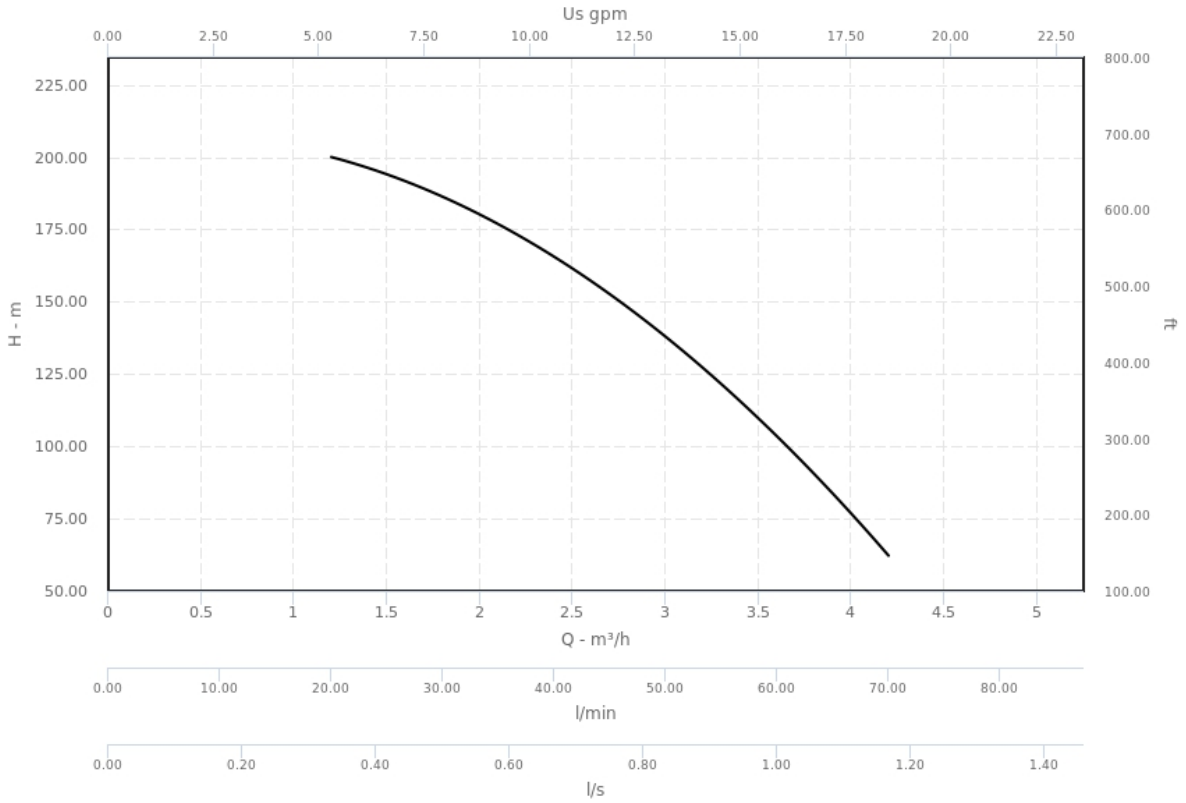

DATA: 15/09/2022

**72S43321006: 4SDPM 3/32C**

## DIMENSIONI (MM)

**dn2:** Rp 1 1/4"  
**f:** 787.00 mm  
**fM:** 1304.00 mm  
**I5:** 98

