

## XKP-06 (> 1.0kW) Swimming pool pump >1,0kw

### Application

- Suitable for water circulation in small and medium swimming pools. Lightly dirty water with suspended particles will be perfectly filtered


### Pompe

- Plastic body pump
- AISI 304 stainless steel shaft
- Maximum liquid temperature: +35°C
- Maximum suction height: 3.5 m

### Moteur

- Copper winding motor or aluminium
- Integrated thermal protection for single-phase motors
- Insulation class: F
- Protection class: IPX5


### Identification codes

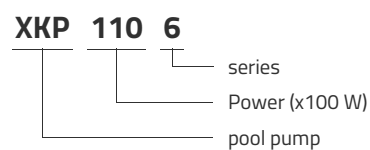

## Technical data


MODEL	kW	Q (m <sup>3</sup> /h)	0	6	12	18	24	30
			Q (l/min)	100	200	300	400	500
XKP1106	1.1	16	15.3	12.3	7.2			
XKP1606	1.6	18	17.7	15.6	11.6	6.2		
XKP2206	2.2	19.5	19	17.2	123.6	8.6	2.2	

## Dimensions

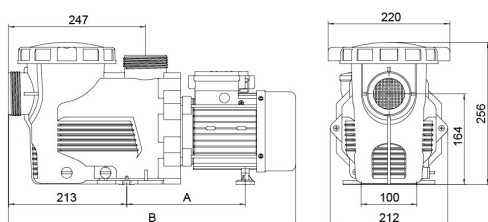

MODEL	A	B
XKP1106	214	250
XKP1606	518	548
XKP2206	518	548

## Hydraulic performance

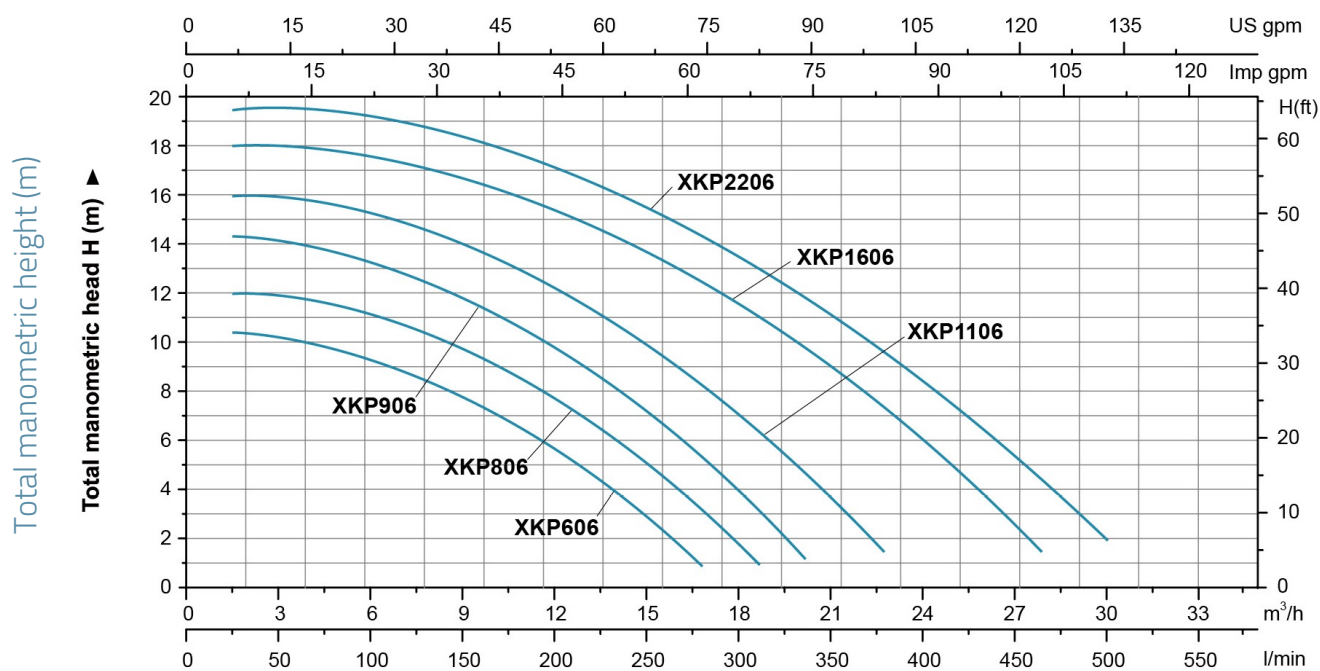

## Packaging

MODEL	Weight (kg)	Length L (mm)	Width W (mm)	Height H (mm)
XKP1106	12.1	575	225	255
XKP1606	15.2	605	225	255
XKP2206	16.8	605	225	255

